ASSEMBLING AND USE INSTRUCTIONS

for your

3000-A
DORMEYER
VERTICAL STYLE
ELECTRIC FOOD MIXER

APPROVED
UNDERWRITERS LABORATORIES

DORMEYER CORPORATION
4300 NO. KILPATRICK AVE.
CHICAGO 41, ILLINOIS

PRINTED IN U. S. A.

ASSEMBLY OF YOUR MIXER

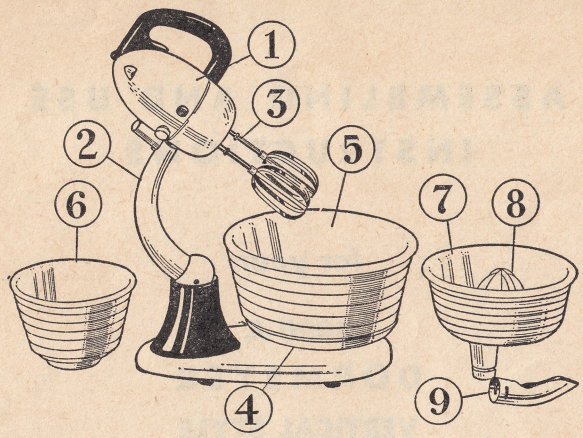

HAS THESE PARTS:

1. Motor
2. Stand and Arm
3. Stain-resisting Beaters
4. Turntable
5. Large Bowl
6. Small Bowl
7. Juice Extractor Bowl
8. Juice Reamer
9. Juice Directing Spout

Voltage

Motor should be used only on voltages of 110 to 125 AC-DC; operates with 100% efficiency on either alternating or direct current.

Oiling

Mixer needs no oiling. Lubrication has been provided for life of mixer at time of manufacture.

Cleaning the Mixer

Clean motor case by wiping with damp cloth. Do not place motor into water. Wash detached beaters in hot soapy water and dry thoroughly. Care must be taken in cleaning the bowls. Sudden heating or chilling will crack glass. Boiling water should not be used.

Turntable Adjustment

Your mixer leaves the factory adjusted to glassware. In case additional adjustment is desired, loosen nut below base and adjust turntable so beaters clear bottom of bowl by thickness of a one cent piece. Re-tighten nut.

Speed Control Knob

Motor has 3 speeds regulated by small black knob on side of motor and indicated by numbers on housing—number 1 being low speed and 3, high.

DO NOT HEAT OR CHILL GLASS BOWLS SUDDENLY

ASSEMBLING AND USE

Mounting and Removing Motor →

To mount motor take by handle and place bracket on the side opposite to handle over the pin on support arm. To remove for portable use lift motor from support pin.

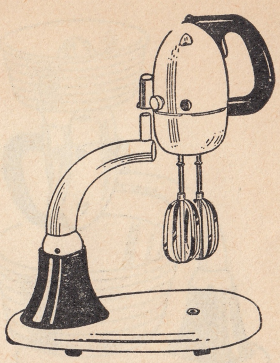

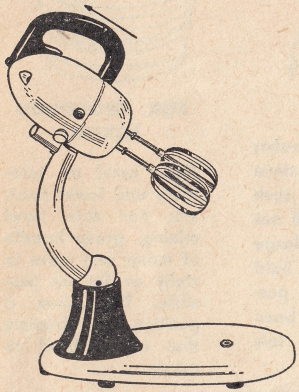

← Tilting Motor

A hinged joint allows tilting of motor so that beaters and bowls may be placed and removed easily. This also facilitates draining of beaters into bowls. Lift upwards and backwards by handle.

Inserting and Removing Beaters →

Beaters are identical and can be placed in either opening on under side of motor. Grip below collar and insert stem in socket. To remove, grasp above collar and pull firmly.

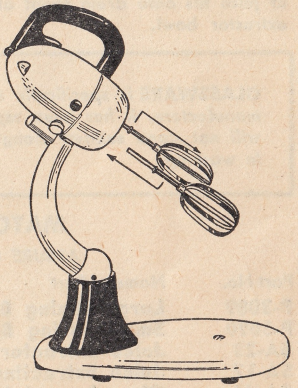

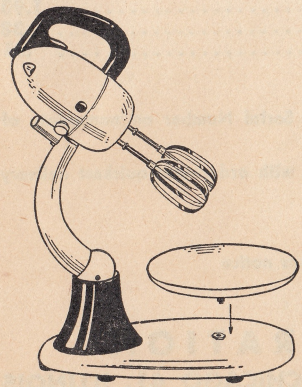

← Mounting Turntable

The underside of turntable has a stem that fits into the hole in the base in which it revolves freely.

ADDED VERSATILITY

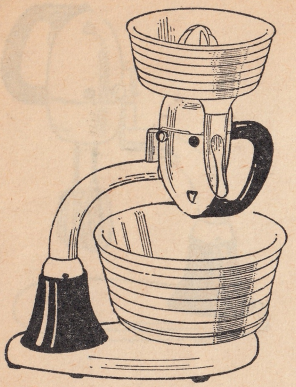

JUICE EXTRACTOR

With beaters removed lift motor from stand, invert and replace onto stand in this inverted position. Place metal collar of juicer bowl into either one of beater sockets and insert spindle of reamer through center hole of bowl. Metal spout to direct flow of juice fits onto drain spout of extractor bowl.

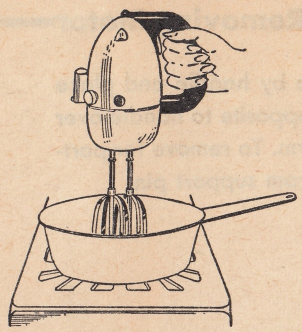

PORTABLE USE

The portable feature makes it possible to mix at the stove or to use beaters in such quantity mixtures as will not be accommodated by large bowl. For portable use hold beaters as upright as possible. The handle has been especially designed for this purpose.

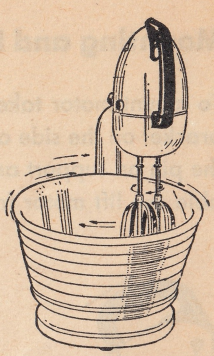

FOR THOROUGH MIXING

Place bowl on turntable and lower beaters. For side bowl mixing, grasp handle of motor and move to right as far as possible. This gives a position to beaters that causes bowl to rotate.

GLASSWARE *is specifically made for and adapted to your mixer. In the process of manufacture, it has been especially treated to withstand breakage. However, glassware will not stand sudden changes in temperature — cold to hot, or hot to cold. Use care in washing.*

MATCHED REPLACEMENT PARTS

ASSURE CONTINUOUS PERFECT PERFORMANCE

Part No.	Name of Part	Price
P-3089	Large Mixing Bowl	$1.25
P-3090	Small Mixing Bowl	.63
SA-23	Juice Extractor Bowl	1.90
SA-17	Juice Extracting Reamer	.38
SA-44	Chromium, stain-resistant Beater, each	.81

HOW TO ORDER

Use Part Number and Part Name. Give Model Number and Serial Number on nameplate of your mixer.

Above prices include prepaid parcel post to you. Send check with order—get quickest delivery and avoid parcel post C.O.D. charges.

Be sure to state your full name and address.

Prices subject to change without previous notice

Send your order direct to

DORMEYER CORPORATION

4300 NORTH KILPATRICK AVENUE CHICAGO 41, ILLINOIS